REVISION	03
DATE	20.01.25


KARAM®

TECHNICAL DATA SHEET


PRODUCT : RETRACTABLE FALL ARREST GI WIRE ROPE BLOCK

REF NO. : TPGS 10

SIDE VIEW

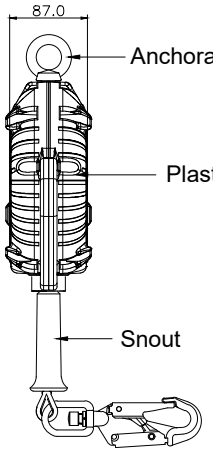

FRONT VIEW

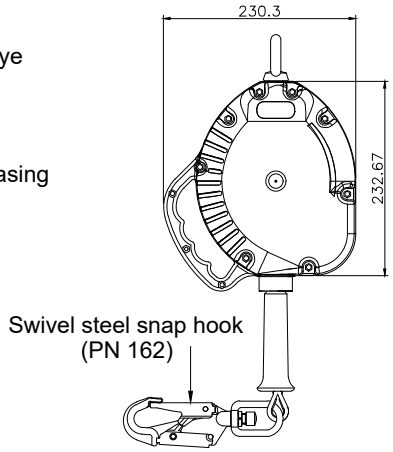

Conforms to EN 360:2002

01	PHYSICAL PARAMETERS	• Robust & durable plastic casing. • Has anchorage eye at anchorage end. • Swivel steel snap hook with load Indicator our ref. (PN 162) at attachment end. • Galvanized steel wire rope (option of having S.S. wire rope available).
02	LENGTH	• Reference No. — Reference No. TPGS 7.5 — 7.5 Meters TPGS 08 — 08 Meters TPGS 09 — 09 Meters TPGS 10 — 10 Meters
03	CABLE	• Material : Galvanized steel wire rope Ø4.5mm. • Minimum Breaking strength : 15 kN or 1,530 kgf.
04	VITAL TEST COMPLIANCE	• Static Strength : 12 kN for 3 Minutes. • Dynamic performance : 140 kg mass free fall of 600 mm with the breaking force of less than 6 kN & arrest distance less than 2 mts.

TECHNICAL DATA SHEET

REVISION	03
DATE	20.01.25

KARAM

TECHNICAL DATA SHEET

05	WEIGHT	• TPGS 7.5 : 4.04 kgs ± 0.10kgs. • TPGS 08 : 4.12 kgs ± 0.10kgs. • TPGS 09 : 4.20 kgs ± 0.10kgs. • TPGS 10 : 4.28 kgs ± 0.10kgs.

PRODUCT IMAGE



TECHNICAL DATA SHEET